

# 5.0V HCMOS COMPATIBLE SMD VCXO



5.0 x 3.2 x 1.2mm

ASFV



**RoHS**  
Compliant

## FEATURES:

- Pb-Free/RoHS Compliant
- Smallest industry package
- Tri state function
- Suitable for high density SMT
- IR reflow capable
- Hermetically sealed

## APPLICATIONS:


- CCD clock for VTR camera
- Computers and peripherals
- Portable MP3 players and games

## STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N:	ASFV Series
Frequency range:	1.500000MHz - 50.000000MHz
Operation mode:	Fundamental
Operating temperature:	-10°C to +70°C (see options)
Storage temperature:	-50°C to +100°C
Overall Frequency Stability:	± 100ppm max. (see options)
Supply Voltage (Vdd):	5.0 V ± 10%
Current Consumption (Idd):	15mA max for 1.5 ~ 19.9MHz 25mA max for 20.0 ~ 40.0MHz 40mA max for 40.1 ~ 50.0MHz
Symmetry (Duty Cycle):	50% ± 10% (see options)
Rise and Fall Times:	7ns max.
Output Load:	15pF (HCMOS)
Output Voltage:	VOH = 0.9*Vdd min. VOL = 0.1*Vdd max.
Voltage Control:	0.5 to 4.5V
Transfer Function:	Positive
Linearity:	<±150 ppm freq. deviation: 10% max.; 6% typical >±150 ppm freq. deviation: 20% max.; 15% typical
Start-up-time:	5mS max for 1.5 ~ 32MHz 10mS max for Frequency > 32MHz
Aging per year:	± 5ppm @25°C
Phase Jitter RMS:	10pS typical
Pullability:	± 60ppm (see options)

## OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

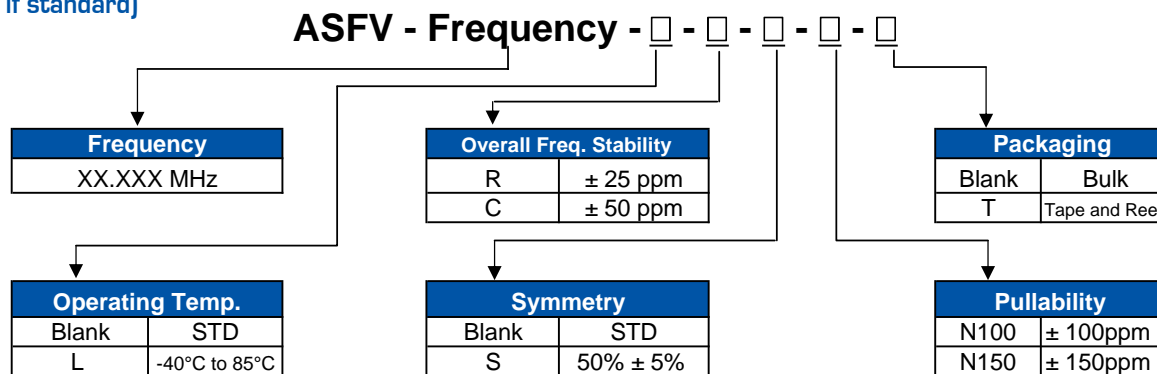

# 5.0V HCMOS COMPATIBLE SMD VCXO

ASFV




RoHS  
Compliant




5.0 x 3.2 x 1.2mm

## OUTLINE DRAWING:

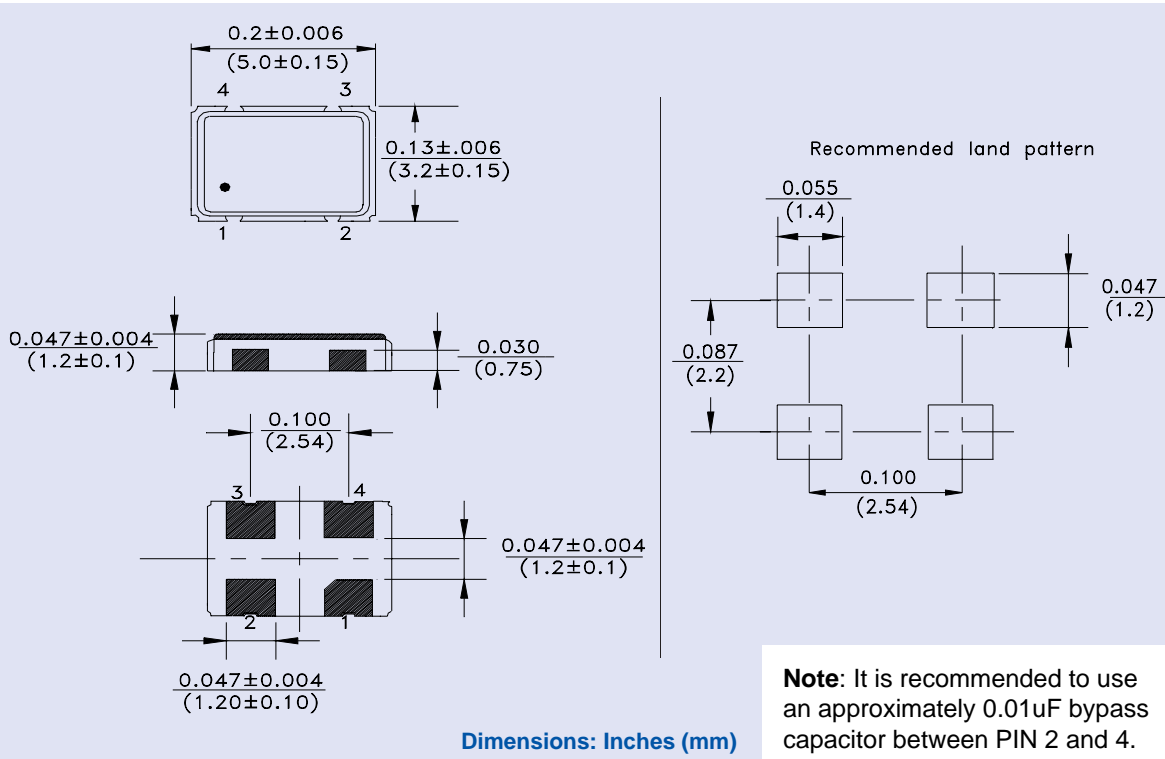

PIN	FUNCTION
1	Voltage Control
2	Ground
3	Output
4	VDD

## TAPE & REEL:

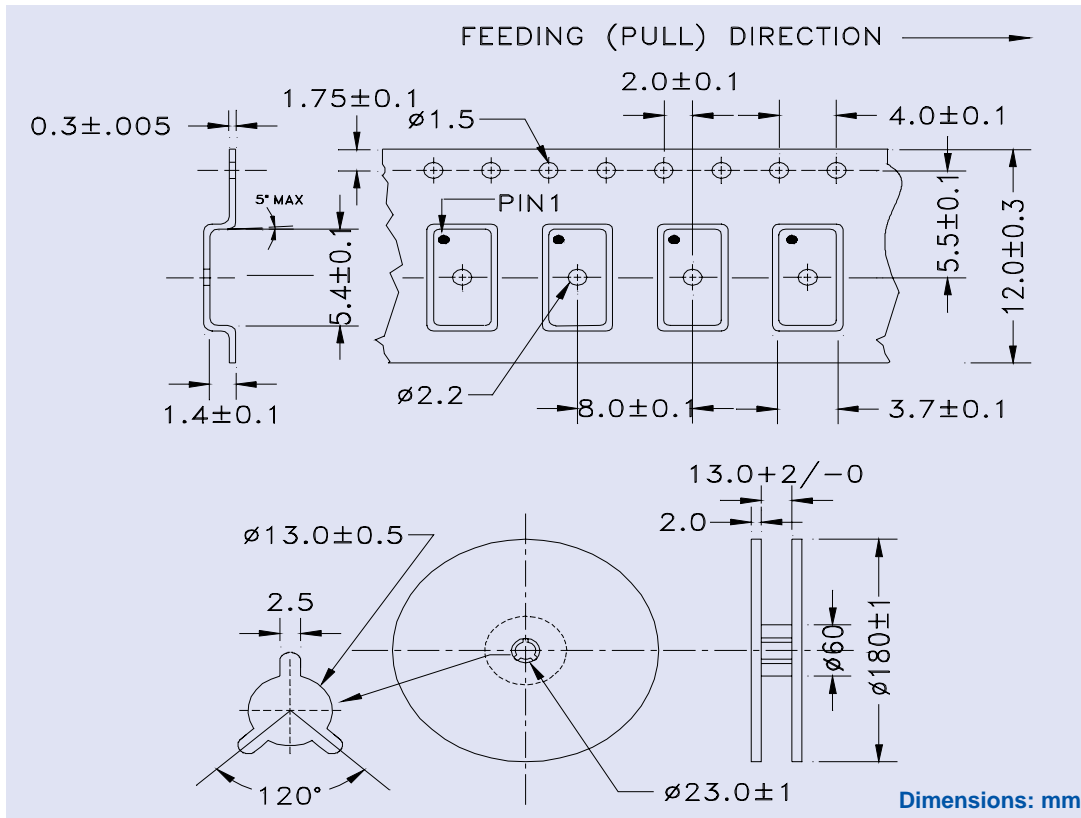

ABRACON IS  
ISO 9001 / QS 9000  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 07.11.07**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)